

3 In case that the application demands a high level of reliability, such as automotive, please contact a company representative for further information.

6	7	8	9	10	11
BY	CHKD	DATE	DESCRIPTION OF REVISIONS	COUNT	DATE




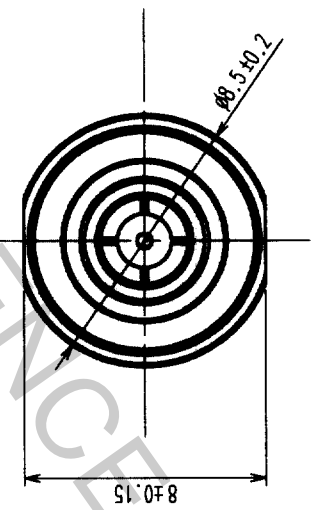


FIGURE 1(2:1)

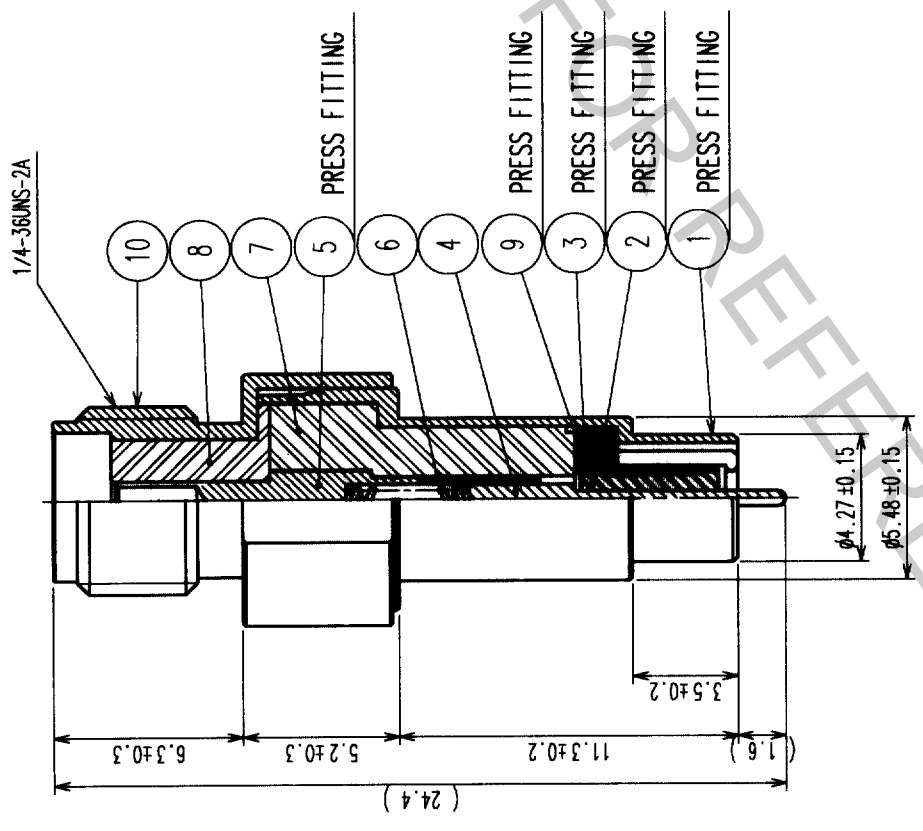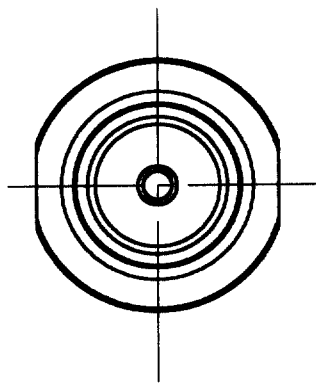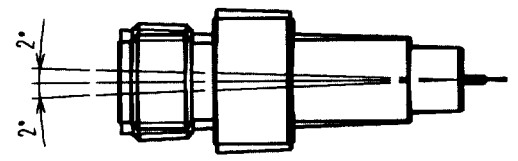

HRS DRAWING FILED

NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
5	BERYLLIUM COPPER	GOLD	10	STAINLESS STEEL	PASSIVATE
4	PHOSPHOR BRONZE	GOLD	9	PTFE	
3	PHOSPHOR BRONZE	NICKEL	8	PTFE	
2	PHOSPHOR BRONZE	GOLD	7	PTFE	
1	PHOSPHOR BRONZE	NICKEL	6	STAINLESS STEEL	GOLD

CODE NO. (OLD)	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
<i>K. Nishida</i>	<i>K. Nishida</i>	<i>K. Nishida</i>	<i>Y. Tsubota</i>	
02.6.26	02.6.26	02.6.26	02.6.26	02.6.26

NOTE 1. Use this product with MS-156 (CL358-0167-4).  
 2. Mating angle must be less than ±2 degree. (refer to figure 1)

DRAWING NO.	MS-156-HRMJ-2
SCALE	4 : 1
UNITS	MM
PART NO.	EDC3-180280
CODE NO.	CL358-0170-2

TO	
RFD	