

Master cable - SAC-14P- 5,0-PUR/M16FR - 1693746


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Master cable, application: Sensor/actuator box, connection method: M8 socket Metal, number of slots: 10, number of positions: 14, slot assignment: single, status display: No; master cable connection: M16 plug connection, PUR/PVC, cable length: 5 m, shielding: no



Key Commercial Data

Packing unit	1 pc
GTIN	 4 017918 189082
GTIN	4017918189082
Sales Key	02

Technical data

General

Rated voltage	125 V AC 150 V DC
Number of positions	14
Number of slots	10
Sensor/actuator connection system	M8 socket

Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-25 °C ... 90 °C (Plug / socket) -40 °C ... 90 °C (for fixed installation) -5 °C ... 80 °C (for flexible installation)

Master cable data/connection data

Connection method	M16 plug connection
Length of cable	5 m
Cable type	Master cable suitable for flexible cable conduit
Signal line cross section	10x 0.34 mm ²
AWG signal line	22

Master cable - SAC-14P- 5,0-PUR/M16FR - 1693746

Technical data

Master cable data/connection data

Conductor structure signal line	42x 0.10 mm
Power supply cross section	2x 0.75 mm ²
AWG power supply	18
Conductor structure, voltage supply	96x 0.10 mm
External diameter	9.1 mm
Max. bending cycles	1500000
Bending radius	100 mm
Traversing path	2 m
Traversing rate	2 m/s

Insulation material

Housing material	PUR
Material of contact, master cable side	CU alloy
Material of contact surface, master cable side	Gold-plated
Material of the contact carrier on the master cable side	TPU
Material of threaded sleeve	Cu alloy
Material of threaded sleeve surface	Nickel-plated
Sealing material	NBR

Connection assignment

Slot/position = pin = conductor color	1 / 4 (A) = P = WH
	2 / 4 (A) = J = GN
	3 / 4 (A) = T = YE
	4 / 4 (A) = S = GY
	5 / 4 (A) = G = PK
	6 / 4 (A) = R = RD
	7 / 4 (A) = E = BK
	8 / 4 (A) = O = VT
	9 / 4 (A) = C = WH/PK
	10 / 4 (A) = N = PK/BN
	1-10 / 1 (+120 V) = A+M = BN
	1-10 / 3 (0 V) = L+U = BU


Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50
	For details about hazardous substances go to tab "Downloads", Category "Manufacturer's declaration"

Drawings


Master cable - SAC-14P- 5,0-PUR/M16FR - 1693746

Cable cross section



PUR/PVC black [PUR]

Circuit diagram

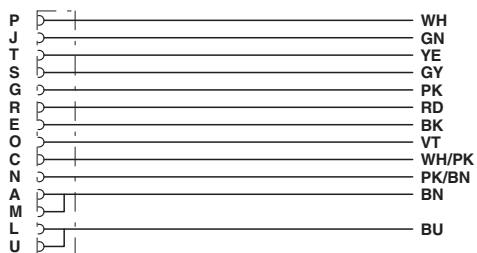

Contact assignment of the M16 socket

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC		B.00767
-----	--	---------

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
<http://www.phoenixcontact.com>